



MINI LOG-PERIODIC **AMPLIFIED** ANTENNA

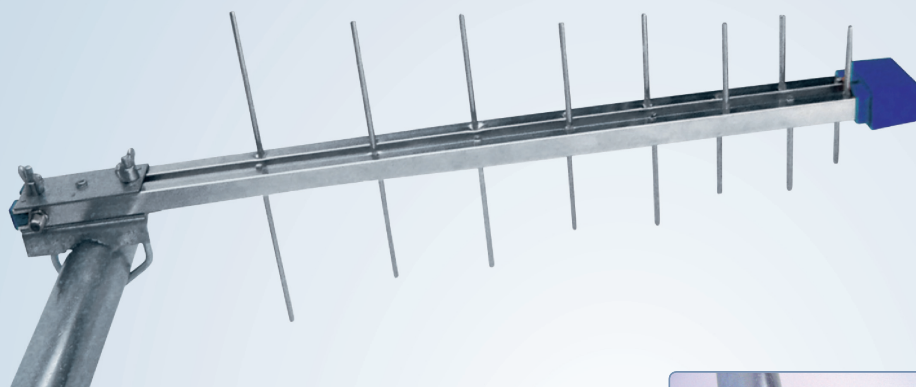


HDtv
High Definition

DVB T



Horizontal or vertical polarization

Shielded F connector
Impulsion noise shield ideal for DTT reception.

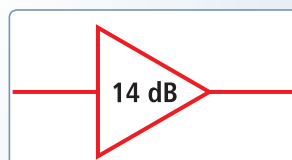


Built-in wideband amplifier

Works with supplies from 5V to 24V (40 mA)

Extremely low Noise Factor

TECHNICAL CHARACTERISTICS

Code	AN6009A
Model	Active Mini-Log
Channels	21-69
Max Gain (dB)	10,5 (passive) / 24 (active)
Beamwidth H/V	50 / 75
Front/back ratio	18
Polarization adjustment	H-V
Inclination adjustment	Yes
Winload(150Km/h)	4,5 kp
Lenght(m)	0,55

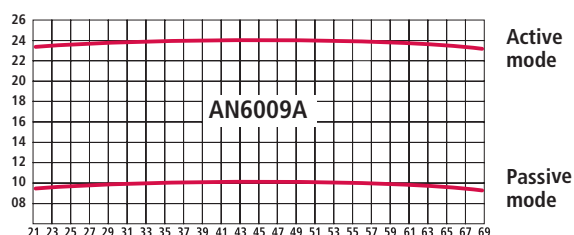

All elements made with rigid and robust extrusion aluminum.
Active / Passive log-periodic antenna.

Accepts any power supply from 5V to 24V without changing its performance.

Possibility to mount it on community installations (power from professional power supply) or individual installations (power from any receiver).

Does not short circuit if power fails or if it's removed (antenna automatically switches to passive).

Provides 24 dBs gain on active mode and 10 dBs gain on passive mode.

PACKAGE UNITS:

10/350

EAN:

8 413173 381128